

Independent Hospital Pricing Authority

# Australian National Subacute and Non-Acute Patient Classification Version 4.0

**Grouper Software (SNAP4.0.1Grouper)  
User Guide**

July 2022



**IHPA**

## Australian National Subacute and Non-Acute Patient Classification Version 4.0 – Grouper Software (Snap4.0.1Grouper) User Guide – July 2022

© Independent Hospital Pricing Authority 2022

This publication is available for your use under a Creative Commons BY Attribution 3.0 Australia licence, with the exception of the Independent Hospital Pricing Authority logo, photographs, images, signatures and where otherwise stated. The full licence terms are available from the Creative Commons website.



Use of Independent Hospital Pricing Authority material under a Creative Commons BY Attribution 3.0 Australia licence requires you to attribute the work (but not in any way that suggests that the Independent Hospital Pricing Authority endorses you or your use of the work).

*Independent Hospital Pricing Authority material used 'as supplied'.*

Provided you have not modified or transformed Independent Hospital Pricing Authority material in any way including, for example, by changing Independent Hospital Pricing Authority text – then the Independent Hospital Pricing Authority prefers the following attribution:

*Source: The Independent Hospital Pricing Authority*

# Contents

<b>1</b>	<b>Introduction</b>	<b>6</b>
1.1	Background	6
1.2	Purpose	6
1.3	Scope	7
1.4	Application requirements	7
1.5	Input data preparation	7
<b>2</b>	<b>SNAP4.0.1Grouper requirements</b>	<b>9</b>
2.1	General requirements	9
2.2	Field requirements	9
2.3	Variables required by care type	14
<b>3</b>	<b>SNAP4.0.1Grouper outputs</b>	<b>16</b>
3.1	Valid classes	16
3.2	Error classes	17
<b>4</b>	<b>Processing a file from the SNAP5Grouper user interface</b>	<b>18</b>
4.1	Main window	18
4.2	Steps to run the grouper	19
<b>5</b>	<b>Processing a file from the SNAP4.0.1Grouper command line interface</b>	<b>22</b>

## List of Tables

Table 1. SNAP4.0.1Grouper required variables for the Comma Separated Values (CSV) file.....	8
Table 2. SNAP4.0.1Grouper care type ( <i>care</i> ) permissible values .....	10
Table 3. SNAP4.0.1Grouper Functional Independence Measure score ( <i>Fim_Score1</i> - <i>Fim_Score18</i> ) permissible values .....	12
Table 4. SNAP4.0.1Grouper Health of the Nation Outcome Scale 65+ score - ( <i>Honos65_score1</i> - <i>Honos65_score12</i> ) permissible values .....	13
Table 5. SNAP4.0.1Grouper palliative care phase ( <i>PhaseType</i> ) permissible values.....	14
Table 6. SNAP4.0.1Grouper error classes.....	17
Table 7. SNAP4.0.1Grouper command line arguments.....	22

## List of figures

Figure 1. AN-SNAP V4 Classification Structure - Summary .....	16
Figure 2. SNAP4.0.1Grouper main window.....	18
Figure 3. . Selecting data to be grouped .....	19
Figure 4. Selecting output folder .....	20
Figure 5. Submitting the grouper.....	20
Figure 6. Grouper finished processing .....	21

# Acronyms and Abbreviations

Acronym / Abbreviation	Description
ABF	Activity based funding
ABF APC DRS	Activity Based Funding Admitted Patient Care - Data Request Specification
ABF PCC DRS	Activity Based Funding Palliative Phase of Care - Data Request Specification
AIHW	Australian Institute of Health and Welfare
AN-SNAP	Australian National Subacute and Non-Acute Patient Classification
APC	Admitted Patient Care data collection
AROC	Australasian Rehabilitation Outcomes Centre
ASNAHC NBEDS	Admitted Subacute and Non-Acute Hospital Care National Best Endeavours Data Set
CLI	Command Line Interface
DRS	Data request specification
FIM™	Functional Independence Measure <sup>1</sup>
FRIC	Frailty Related Index of Comorbidities
GEM	Geriatric evaluation and management care type
GUI	Graphical User Interface
HoNOS	Health of the Nation Outcome Scale
IHPA	Independent Hospital Pricing Authority
LoS	Length of stay
METeOR	Australian Institute of Health and Welfare's Metadata Online Data Registry
RUG-ADL	Resource Utilisation Groups - Activities of Daily Living

<sup>1</sup> FIM™ is a trademark of the Uniform Data System for Medical Rehabilitation, a division of UB Foundation Activities Incorporated. The Australasian Rehabilitation Outcomes Centre (AROC) holds the territory license for the use of the FIM™ instrument in Australia.

# 1 Introduction

## 1.1 Background

Under the National Health Reform Agreement 2011, the Independent Hospital Pricing Authority (IHPA) is responsible for determining the activity based funding system for public hospital subacute and non-acute care services. The classification system used for admitted subacute and non-acute care ABF in Australia is the Australian National Subacute and Non-Acute Patient Classification (AN-SNAP).

AN-SNAP is used for subacute and non-acute care funding as well as clinical management and other purposes such as benchmarking, epidemiological studies, safety and quality monitoring, and research to understand practice and cost variation. It was first developed in 1997 and has been refined four times since then.

In December 2013, the Centre for Health Service Development, University of Wollongong, was commissioned by IHPA to develop AN-SNAP Version 4.0 (V4). The classification development process involved a significant level of consultation with jurisdictions, clinicians and other key stakeholders across the subacute sector throughout the project.

Five specialist clinical committees were established to support the classification development in the areas of palliative care, rehabilitation, geriatric evaluation and management, psychogeriatrics and paediatrics and specialised statistical techniques to produce a fully revised version of AN-SNAP that reflects current and evolving clinical practice. AN-SNAP V4 was released May 2015 and will be used to price subacute and non-acute services from 2016–17.

Further information about AN-SNAP V4 is available on the [IHPA website](#).

## 1.2 Purpose

The AN-SNAP V4 software grouper application (the SNAP4.0.1Grouper) groups records of admitted subacute and non-acute care into an AN-SNAP V4 class (or error class if there is missing information preventing grouping to a valid class).

The SNAP4.0.1Grouper uses variables defined according to the Australian Institute of Health and Welfare's (AIHW) Metadata Online Data Registry (METeOR)<sup>2</sup> metadata standards; and specified in the Admitted Patient Care National Minimum Data Set (APC NMDS)<sup>3</sup> and Admitted subacute and non-acute hospital care national best endeavours data set (ASNAHC NBEDS).<sup>4</sup>

The SNAP4.0.1Grouper application is available as a Graphical User Interface (GUI) or Command Line Interface (CLI) executable. The application provides the following functions:

- Group a Comma Separated Values (CSV) data file interactively
- View results through a user interface
- Output results as a CSV file containing the AN-SNAP V4 class appended to each row.

---

<sup>2</sup> The Australian Institute of Health and Welfare's (AIHW) Metadata Online Data Registry (METeOR) is Australia's repository for national metadata standards for health statistics and information. Where ever possible, AN-SNAP V4 terms are defined using METeOR standards. METeOR references are correct as at the time of publication. Readers should always consider any superseded related metadata relationships when cross-referencing with METeOR identifiers.

<sup>3</sup> METeOR 728439

<sup>4</sup> METeOR 727327

### 1.3 Scope

The SNAP4.0.1Grouper only groups records of admitted patient care. AN-SNAP is not used by IHPA for non-admitted care pricing so this is out of scope for the SNAP4.0.1Grouper.

### 1.4 Application requirements

The SNAP4.0.1Grouper application has no specific requirements. The GUI and CLI executables are packed for Microsoft Windows. If the software is needed to be used on other operating systems, the python source code is available on request.

### 1.5 Input data preparation

The SNAP4.0.1Grouper application requires a single data file to be provided in the CSV format. Table 1 details the variables and the order of the variables required in the CSV.

**Table 1. SNAP4.0.1Grouper required variables for the Comma Separated Values (CSV) file**

Column order	Field	Column order	Field	Column order	Field	Column order	Field	Column order	Field
1	stateid	31	x12ddx25	61	x12ddx55	91	x12ddx85	121	fim_score14
2	care	32	x12ddx26	62	x12ddx56	92	x12ddx86	122	fim_score15
3	bir_date	33	x12ddx27	63	x12ddx57	93	x12ddx87	123	fim_score16
4	adm_date	34	x12ddx28	64	x12ddx58	94	x12ddx88	124	fim_score17
5	sep_date	35	x12ddx29	65	x12ddx59	95	x12ddx89	125	fim_score18
6	leavedays	36	x12ddx30	66	x12ddx60	96	x12ddx90	126	honos65_score1
7	x12ddx1	37	x12ddx31	67	x12ddx61	97	x12ddx91	127	honos65_score2
8	x12ddx2	38	x12ddx32	68	x12ddx62	98	x12ddx92	128	honos65_score3
9	x12ddx3	39	x12ddx33	69	x12ddx63	99	x12ddx93	129	honos65_score4
10	x12ddx4	40	x12ddx34	70	x12ddx64	100	x12ddx94	130	honos65_score5
11	x12ddx5	41	x12ddx35	71	x12ddx65	101	x12ddx95	131	honos65_score6
12	x12ddx6	42	x12ddx36	72	x12ddx66	102	x12ddx96	132	honos65_score7
13	x12ddx7	43	x12ddx37	73	x12ddx67	103	x12ddx97	133	honos65_score8
14	x12ddx8	44	x12ddx38	74	x12ddx68	104	x12ddx98	134	honos65_score9
15	x12ddx9	45	x12ddx39	75	x12ddx69	105	x12ddx99	135	honos65_score10
16	x12ddx10	46	x12ddx40	76	x12ddx70	106	x12ddx100	136	honos65_score11
17	x12ddx11	47	x12ddx41	77	x12ddx71	107	impairmenttype	137	honos65_score12
18	x12ddx12	48	x12ddx42	78	x12ddx72	108	fim_score1	138	rugadl_total
19	x12ddx13	49	x12ddx43	79	x12ddx73	109	fim_score2	139	Phaseid
20	x12ddx14	50	x12ddx44	80	x12ddx74	110	fim_score3	140	Phase_StartDate
21	x12ddx15	51	x12ddx45	81	x12ddx75	111	fim_score4	141	Phase_EndDate
22	x12ddx16	52	x12ddx46	82	x12ddx76	112	fim_score5	142	PhaseType
23	x12ddx17	53	x12ddx47	83	x12ddx77	113	fim_score6		
24	x12ddx18	54	x12ddx48	84	x12ddx78	114	fim_score7		
25	x12ddx19	55	x12ddx49	85	x12ddx79	115	fim_score8		
26	x12ddx20	56	x12ddx50	86	x12ddx80	116	fim_score9		
27	x12ddx21	57	x12ddx51	87	x12ddx81	117	fim_score10		
28	x12ddx22	58	x12ddx52	88	x12ddx82	118	fim_score11		
29	x12ddx23	59	x12ddx53	89	x12ddx83	119	fim_score12		
30	x12ddx24	60	x12ddx54	90	x12ddx84	120	fim_score13		



# 2 SNAP4.0.1Grouper requirements

## 2.1 General requirements

### 2.1.1 No column headers

The SNAP4.0.1Grouper will attempt to process **all** rows in the CSV. This includes the header row. If a header row has been provided, the SNAP5Grouper will group it to an error class.

### 2.1.2 Date Format

The following fields are date fields:

- bir\_date
- adm\_date
- sep\_date
- Phase\_StartDate
- Phase\_EndDate

The required format for these date fields is dd/mm/yyyy. For example the date January 31st, 2021 would be formatted as: 31/01/2021.

## 2.2 Field requirements

### 2.2.1 Episode Number (stateid)

**METeOR Identifier:** 679557

**Expected Format for valid field:** String with up to 80 alphanumeric characters.

A logical combination of alphanumeric characters that uniquely identifies a record.

The field *stateid* is the stable and unique identifier of a patient episode of care. The grouper expects this field to be a string. This value is used in identifying the first in episode Palliative Care phase.

Variable used in sorting and linking episodes, used in grouping palliative care episodes.

### 2.2.2 Hospital Service - care type (care)

**METeOR Identifier:** 711010

**Expected Format for valid field:** Whole number - up to two numeric characters.

The overall nature of a clinical service provided to an admitted patient during an episode of care (admitted care), as represented by a code.

The field *care* is formatted as a whole integer number. If the grouper does not match a permissible care type value an error class will be returned for row.

Permissible values are as set out in Table 2.

**Table 2. SNAP4.0.1Grouper care type (*care*) permissible values**

Value	Description
2	Rehabilitation Care
3	Palliative Care
4	Geriatric evaluation and management (GEM)
5	Psychogeriatric Care
6	Maintenance Care

### 2.2.3 Person Date of Birth - (*bir\_date*)

**METeOR Identifier:** 287007

**Expected Format for valid class:** DD/MM/YYYY - 10 alphanumeric characters.

The date of birth of the person, expressed as DD/MM/YYYY.

The field *bir\_date* is a date field in format of dd/mm/yyyy. For example, the following date entry will be considered as valid: 20/05/2021.

The field is used in calculating the individual's age. Age is derived from the start of patient care (*adm\_date*) - Individual's Date of Birth.

If *bir\_date* is greater than *adm\_date* or *sep\_date* the episode will return an error class. An error class will also be returned if *bir\_date* is less than 01/01/1900. If any of the date time formats are incorrect, an error class will be returned for that episode (CSV row).

### 2.2.4 Episode of admitted patient care - admission date (*adm\_date*)

**METeOR Identifier:** 695137

**Expected Format for valid class:** DD/MM/YYYY - 10 alphanumeric characters.

The date on which an admitted patient commences an episode of care, expressed as DD/MM/YYYY.

The field *adm\_date* is a date field in the format of DD/MM/YYYY. For example, the following date entry will be considered as valid: 20/05/2021.

The field is used in calculating the length of stay: *sep\_date* - *adm\_date* - *LeaveDays*.

### 2.2.5 Episode of admitted patient care - separation date (*sep\_date*)

**METeOR Identifier:** 270025

**Expected Format for valid class:** DD/MM/YYYY - 10 alphanumeric characters.

The date on which an admitted patient completes an episode of care, expressed as DD/MM/YYYY.

The field *sep\_date* is a date field in the format of DD/MM/YYYY. For example, the following date entry will be considered as valid: 20/05/2021.

The field is used in calculating the length of stay: *sep\_date* - *adm\_date* - *LeaveDays*.

### 2.2.6 Episode of admitted patient care – number of leave days (LeaveDays)

**METeOR Identifier:** 270251

**Expected Format for valid class:** Whole number  $\geq 0$

Sum of the length of leave (date returned from leave minus date went on leave) for all periods within the hospital stay.

The field *LeaveDays* is a whole number field greater or equal to 0. The variables should be consistent across the episode.

The field is used in calculating the length of stay: *sep\_date* - *adm\_date* - *LeaveDays*.

### 2.2.7 Episode of care - principal diagnosis, Primary and Additional - (x12ddx1 - x12ddx100)

**METeOR Identifier:** 746665

**Expected Format for valid class:** String of 8 alphanumeric characters.

The diagnosis established after study to be chiefly responsible for occasioning an episode of admitted patient care as represented by a code.

The Diagnosis code field is expected to be a string and is used in calculating the Frailty Related Index of Comorbidities (FRIC) which is used to group episodes of GEM and some non-acute care episodes.

The SNAP5Grouper also provides a Dementia or Delirium present flag (although this is not used as a binary variable in the classification). The flag will be true if the following diagnosis codes are present: F00.00, F00.01, F00.10, F00.11, F00.20, F00.21, F00.90, F00.91, F01.00, F01.01, F01.10, F01.11, F01.20, F01.21, F01.30, F01.31, F01.80, F01.81, F01.90, F01.91, F02.00, F02.01, F02.10, F02.11, F02.20, F02.21, F02.30, F02.31, F02.40, F02.41, F02.80, F02.81, F03.00, F03.01.

Data reported must be aligned with either the ICD-10-AM Eleventh or Twelfth Edition, this will be dependent on the edition that is utilised locally.

### 2.2.8 Episode of admitted patient care - primary impairment type - (Impairmenttype)

**METeOR Identifier:** 681412

**Expected Format for valid class:** String with up to 7 numeric characters.

The impairment which is the primary reason for the admission to an episode of care, as represented by a code.

The *Impairmenttype* code is expected to be a string that matches the Australasian Rehabilitation Outcomes Centre (AROC) Impairment codes used to classify rehabilitation episodes into like clinical groups.<sup>5</sup>

---

<sup>5</sup> See Australasian Rehabilitation Outcomes Centre (2013) [AROC Impairment Coding Guidelines](#).

### 2.2.9 Person - level of functional independence, Functional Independence Measure score - (Fim\_Score1 - Fim\_Score18)

**METeOR Identifier:** 717982

**Expected Format for valid class:** Whole number between 1 and 7 - 1 numeric character

A person's level of functional independence to carry out activities of daily living safely and autonomously, as represented by a Functional Independence Measure\_score-based code.

*Fim\_score 1* through to *Fim\_score13* are used to calculate the Functional Independence Motor Score. *Fim\_score14* through to *Fim\_score18* are also used to calculate the Functional Independence Cognition Score.

The grouper is expecting the values of each FIM item to be between 1 and 7 as set out in Table 3.

**Table 3. SNAP4.0.1Grouper Functional Independence Measure score (*Fim\_Score1 - Fim\_Score18*) permissible values**

Value	Description
1	Total assistance with helper
2	Maximal assistance with helper
3	Moderate assistance with helper
4	Minimal assistance with helper
5	Supervision or setup with helper
6	Modified independence with no helper
7	Complete independence with no helper

### 2.2.10 Person - level of psychiatric symptom severity, Health of the Nation Outcome Scale 65+ score - (Honos65\_score1 - Honos65\_score12)

**METeOR Identifier:** 730844

**Expected Format for Valid class:** Whole number between 0 and 4 - 1 numeric character

An assessment of the severity of a person's psychiatric symptoms, as represented by a Health of the Nation Outcome Scale (HoNOS) 65+ score-based code.

*Honos65\_score1* through to *Honos65\_score12* are used to calculate the HoNOS 65+ Total Score field.

The grouper is expecting the values of each HoNOS 65+ score item to be between 0 and 4 as set out in Table 4.

**Table 4. SNAP4.0.1Grouper Health of the Nation Outcome Scale 65+ score - (*Honos65\_score1* - *Honos65\_score12*) permissible values**

Value	Description
0	No problem within the period stated
1	Minor problem requiring no action
2	Mild problem but definitely present
3	Moderately severe problem
4	Severe to very severe problem

### 2.2.11 Person - level of functional independence, Resource Utilisation Groups– Activities of Daily Living total score - (*Rugadl\_total*)

**METeOR Identifier:** 717986

**Expected Format for Valid class:** Whole number between 4 and 18 - up to 2 numeric characters.

A person's level of functional independence to carry out activities of daily living safely and autonomously, as represented by a total Resource Utilisation Groups - Activities of Daily Living score-based code.

### 2.2.12 Phase ID - (*PhaseID*)

**METeOR Identifier:** N/A

**Expected Format for valid class:** String of up to 15 alphanumeric characters.

*PhaseID* is the stable and unique identification of a patient palliative phase of care.

A new *PhaseID* is created when the phase changes. These are linked via the *stateID*. The grouper expects this field to be a string.

### 2.2.13 Episode of admitted patient care - palliative care phase start date - (*Phase\_StartDate*)

**METeOR Identifier:** 681043

**Expected Format for valid class:** DD/MM/YYYY - 10 alphanumeric characters.

The date on which an admitted patient commences a palliative care phase, expressed as DD/MM/YYYY.

The field *Phase\_StartDate* is a date field in the format of DD/MM/YYYY.

In addition to being used for classifying an episode to a valid SNAP class it is also used in deriving if a phase ID is the First Phase in Episode, which is used for grouping some overnight adult palliative care phases.

### 2.2.14 Episode of admitted patient care - palliative care phase end date - (Phase\_EndDate)

**METeOR Identifier:** 681040

**Expected Format for valid class:** DD/MM/YYYY - 10 alphanumeric characters.

The field *Phase\_EndDate* is a date field in the format of DD/MM/YYYY.

In addition to being used for classifying an episode to a valid SNAP class it is also used in deriving if a phase ID is the First Phase in Episode, which is used for grouping some overnight adult palliative care phases.

### 2.2.15 Episode of admitted patient care - palliative care phase (PhaseType)

**METeOR Identifier:** 681029

**Expected Format for valid class:** Whole number between 1 and 4 - 1 numeric character.

The patient's stage of illness or situation within the episode of care in terms of the recognised palliative care phase, as represented by a code.

The field *PhaseType* is a date field in the format of a whole integer between 1 and 4.

In addition to being used for classifying a valid code, it is also used in deriving if a phase ID is the First Phase in Episode which is used for grouping some adult palliative care phases.

The grouper is expecting the values of the *PhaseType* item to be a whole number between 1 and 4 as set out in Table 5.

**Table 5. SNAP4.0.1Grouper palliative care phase (*PhaseType*) permissible values**

Value	Description
1	Stable
2	Unstable
3	Deteriorating
4	Terminal

## 2.3 Variables required by care type

### 2.3.1 Rehabilitation - Care type 2

- *Bir\_date*
- *Adm\_date*
- *Sep\_date*
- *Leavedays*
- *Impairmenttype*
- *FIM\_score1* - *FIM\_Score18*

### 2.3.2 Palliative - Care type 3

- *Bir\_date*
- *Adm\_date*
- *Sep\_date*
- *Leavedays*
- *StateID*
- *PhaseType*
- *Phase\_StartDate*
- *Phase\_EndDate*
- *PhaseID*
- *RUGADL\_Total*

### 2.3.3 Geriatric evaluation and management - Care type 4

- *Bir\_date*
- *Adm\_date*
- *Sep\_date*
- *Leavedays*
- *FIM\_Score1 - FIM\_Score18*
- *Honos65\_score1 - Honos65\_score12*
- *Diagnosis codes: X12ddx1 - x12ddx100*

### 2.3.4 Psychogeriatric - Care type 5

- *Bir\_date*
- *Adm\_date*
- *Sep\_date*
- *Leavedays*
- *Honos65\_score1 - Honos65\_score12*


### 2.3.5 Non-acute (Maintenance) - Care type 6

- *Bir\_date*
- *Adm\_date*
- *Sep\_date*
- *Leavedays*
- *RUGADL\_Total*

# 3 SNAP5Grouper outputs

The SNAP5Grouper outputs valid classes and error classes according to the Australian National Subacute and Non-Acute Patient Classification Version 4.0 (AN-SNAP V4) structure summarised in Figure 1.

**Figure 1. AN-SNAP V4 Classification Structure - Summary**

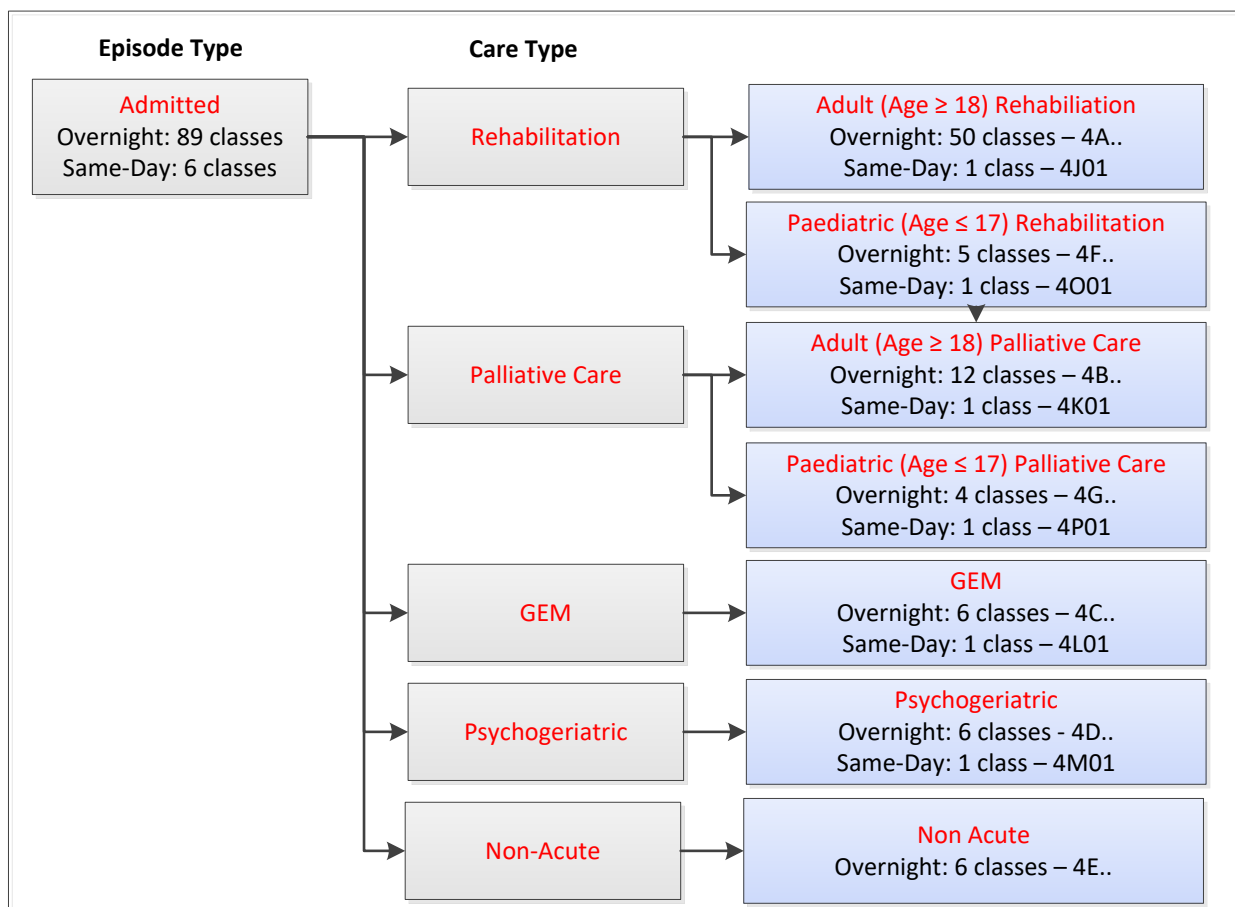

## 3.1 Valid classes

The SNAP4.0.1 Grouper has 103 valid end classes for admitted care:

- 89 overnight classes across the five care types
- six same-day classes – one for each of adult rehabilitation, paediatric rehabilitation, adult palliative care, paediatric palliative care, GEM, and psychogeriatric care.



A complete table of all the AN-SNAP V4 classification admitted end classes including the grouping variables and thresholds is available in the AN-SNAP classification Version 4.0 User Manual.<sup>6</sup>

## 3.2 Error classes

The SNAP4.0.1Grouper has eight ungroupable error classes:

- five adult care type ungroupable error classes
- two paediatric ungroupable error classes (paediatric rehabilitation and paediatric palliative care)
- one other ungroupable error class applicable when a care type (or episode type) cannot be established.

**Table 6. SNAP4.0.1Grouper error classes.**

Error class	Reason
499A	Admitted Adult Rehabilitation - Ungroupable
499B	Admitted Adult Palliative Care - Ungroupable
499C	Admitted GEM - Ungroupable
499D	Admitted Psychogeriatric - Ungroupable
499E	Admitted Non-Acute - Ungroupable
499F	Admitted Paediatric Rehabilitation - Ungroupable
499G	Admitted Paediatric Palliative Care - Ungroupable
4999	Error with Care Type or Episode Type

<sup>6</sup> Green J, Gordon R, Blanchard M, Kobel C and Eager K. (2015), *Development of AN-SNAP Version 4: Final Report*, Centre for Health Service Development, University of Wollongong.

# 4 Processing a file from the SNAP4.0.1Grouper user interface

The application is run by double clicking the AN-SNAPv4.0.1.exe file. This will load the main application window shown in Figure 1, which will guide you through the rest of the process.


## 4.1 Main window

The main window includes the following three buttons:

- **Select Input File**, which is used to select the CSV data file to be grouped;
- **Select Output Directory**, which is used to select the folder for the grouper output file; and
- **Submit**, which runs the grouper.

*Note: the input file requires the data to be prepared as specified in the [Input Data Preparation](#) section.*

**Figure 2. SNAP4.0.1Grouper main window**

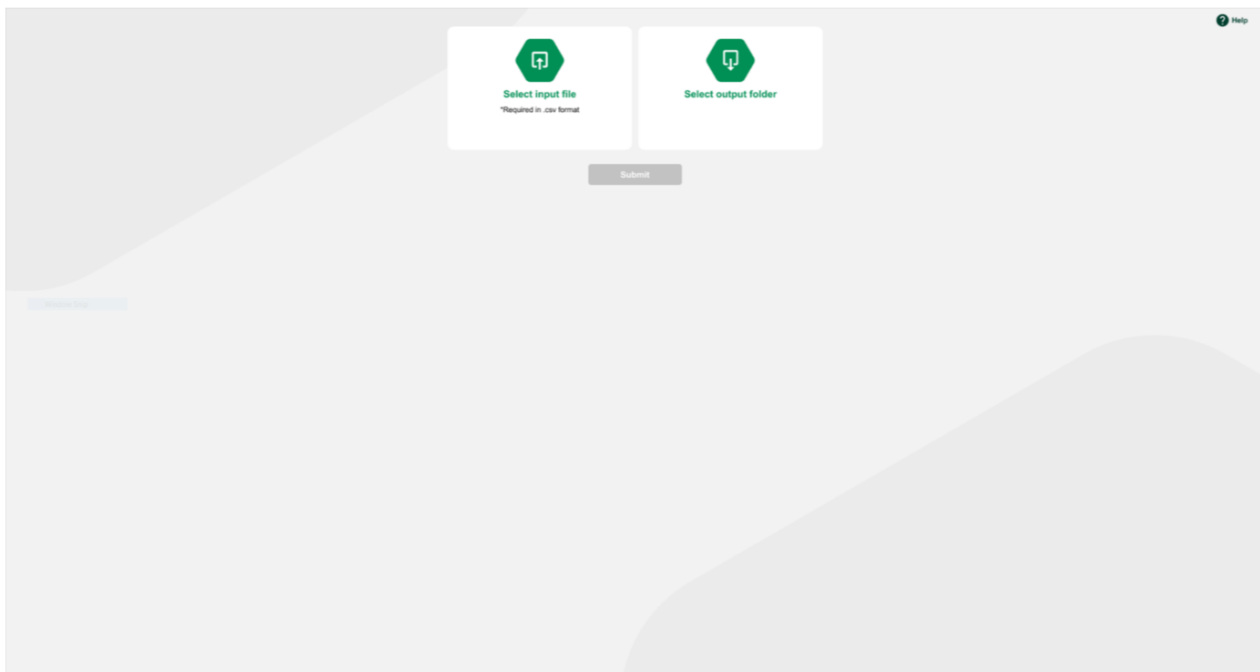

The main window also includes a table that displays a sample of the episodes being processed while the grouper is running; and displays the location of the output file when the grouper is complete. This table previews a subset of the CSV, displaying the following rows:

Stateid, care, bir\_date, adm\_date, sep\_date, leavedays, x12ddx1, x12ddx2, x12ddx3, x12ddx4, x12ddx5, impairmenttype, Phaseid, Phase\_startDate, Phase\_EndDate, PhaseType.


## 4.2 Steps to run the grouper

The steps to run the grouper are outlined below.

### Step 1: Select the Input File

To select a data file to be grouped, Click the Select Input File button, and select the .CSV data file from the Open window, as shown in Figure 2, and click Open.

**Figure 3. . Selecting data to be grouped**

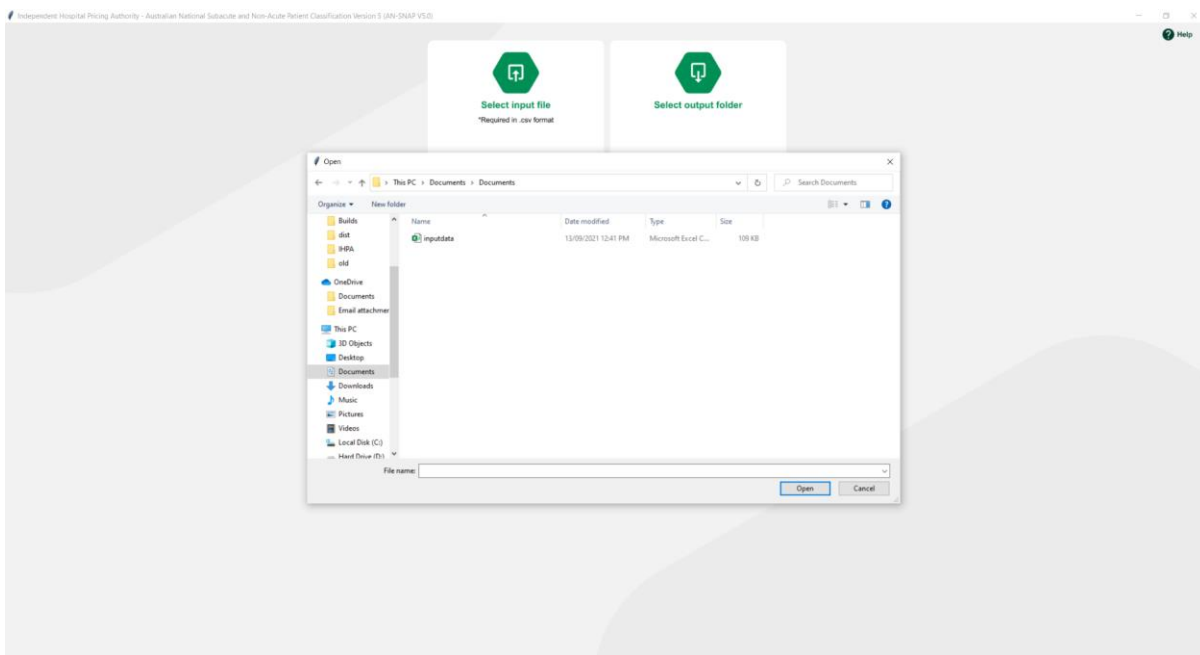


On completion of this step, the filename and path of the file populates the text field to the right of the Select Input File button. This will allow the running of the grouper on the selected file.

## Step 2: Selecting output folder

By default, the grouper outputs to the same folder of the input file. To output a different folder, select the Select Output folder button as shown in Figure 4.


Figure 4. Selecting output folder

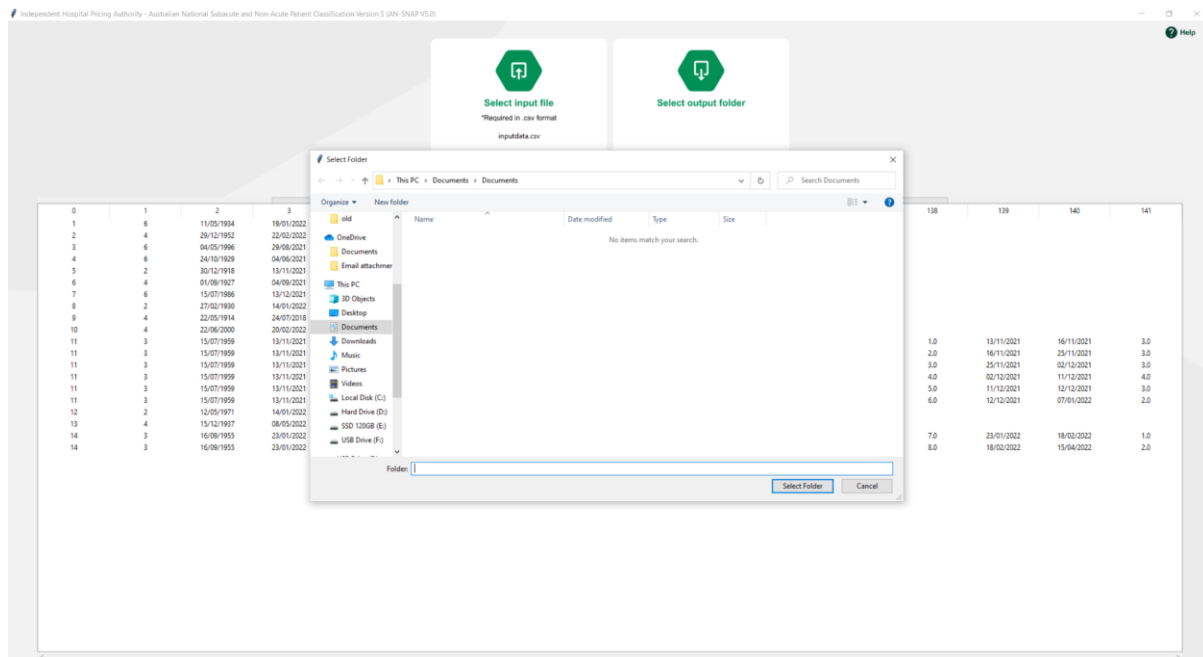

## Step 3: Running the grouper

To run the grouper, select the Submit button as shown in Figure 5.


Figure 5. Submitting the grouper

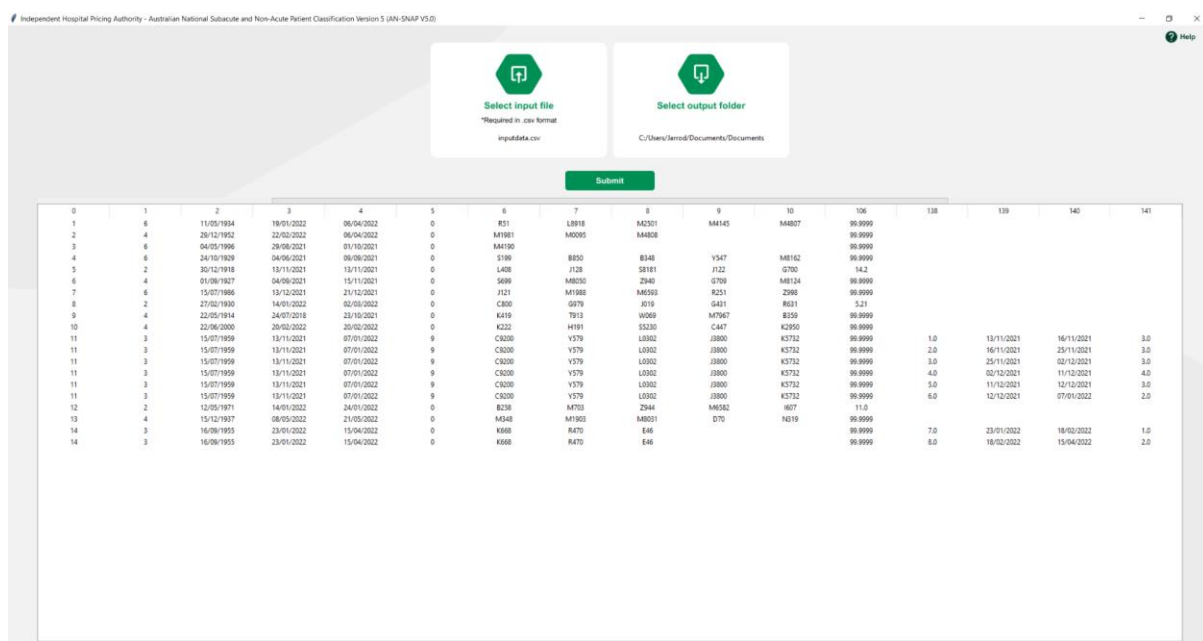

## Step 4: Output of the Grouper

The final output of the grouper will create a new file from the AN-SNAP csv file provided with an additional column appended to the end with the AN-SNAP V4 class

Figure 6. Grouper finished processing

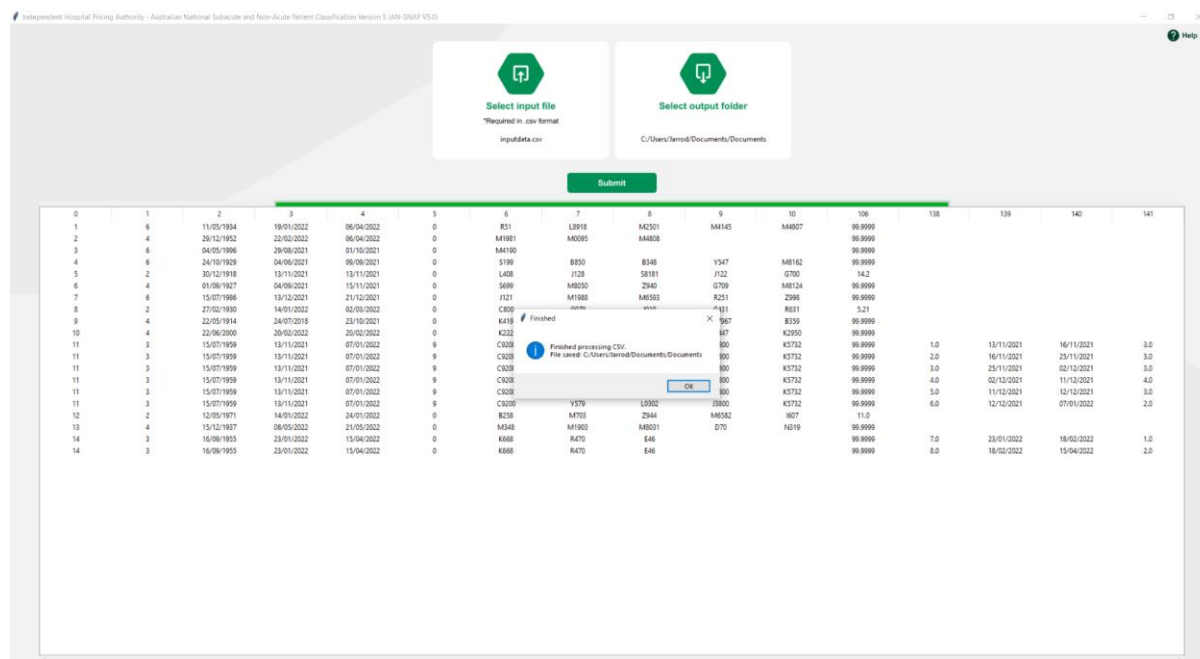

# 5 Processing a file from the SNAP4.0.1Grouper command line interface

The Command Line Interface (CLI) version of the grouper is run by executing the AN-SNAPv4.0.1cli.exe. The CLI version of the application uses the same logic as the Application version and has the same input CSV requirements.

The CLI accepts the following command-line arguments:

**Table 7. SNAP4.0.1Grouper command line arguments**

Command argument	Required	Expected additional parameters	Description
-h	No		Displays information about the CLI, expected arguments and how to use the grouper.
-i --input	Yes	File path to input file	Required parameter of the file path that the grouper will process.
-o --output	Yes	Folder path to output directory	Required parameter of the directory where the grouper will output the processed file.
-d	No		Debug flag, prints a few columns from the first 20 rows found in the CSV.
-e	No		Error flag, creates a CSV output of all error classes and information about why a row was grouped to an error class.
-n	No	Filename	Optional parameter to name the CSV output file.

The following command will run the grouper:

```
AN-SNAPv4.0.1cli.exe -i \Documents\input.csv -o \Documents\
```

Below are some examples of using additional commands:

```
AN-SNAPv4.0.1cli.exe -i \Documents\input.csv -o \Documents\ -d
```

```
AN-SNAPv4.0.1cli.exe -i \Documents\input.csv -o \Documents\ -e
```

```
AN-SNAPv4.0.1cli.exe -i \Documents\input.csv -o \Documents\ -e -n new_file
```

```
AN-SNAPv4.0.1cli.exe -i \Documents\input.csv -o \Documents\ -d -e
```

Independent Hospital Pricing Authority

Eora Nation, Level 12, 1 Oxford Street  
Sydney NSW 2000

Phone 02 8215 1100  
Email [enquiries.ihpa@ihpa.gov.au](mailto:enquiries.ihpa@ihpa.gov.au)  
Twitter @IHPAnews

[www.ihpa.gov.au](http://www.ihpa.gov.au)



IHPA